

Features

- RGB color mixing capability
- Consumes up to 4.6 watts per foot
- Cuttable every 3.94"
- 22 foot max run (16.4 feet for IP68 version)
- (IP54) unjacketed or (IP68) submersible versions
- 50,000 hours rated life

Available CCT



RGB

Control Options

- Trulux RGB Controls
 - Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver

Listing / Ratings




TRULUX™ RGB - 24V

Our RGB Series tape light is a great solution for full color dynamic effects. Transform any space into a special event and add excitement to retail and commercial spaces. With over 16 million color combinations, evenly distribute dynamic color effect lighting that is sure to draw attention the application calls for.

Technical Information

Series	HTL-RGB / HTL68-RGB
Input Voltage	24V
CCT	RGB
CRI	N/A
Wattage	up to 4.6W per ft
Lumens	up to 165Lm/ft
Max Run	22 feet (IP54) / 16.4 feet (IP68)
Cuttable	Every 3.94"
IP Rating	IP54 (unjacketed) / IP68 (submersible)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

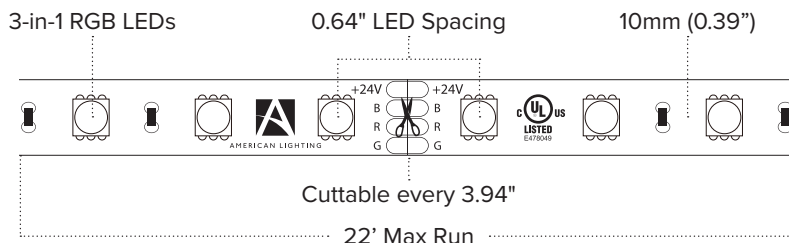



RGB - 24V DC

up to 4.6W per ft / up to 165Lm/ft

16.4ft Reels



HTL-RGB (16.4ft)



HTL68-RGB (16.4ft)

Custom Cut




HTL-RGB-CC

HTL-RGB (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) Standard Power Connectors
 HTL68-RGB (IP68) 16.4ft Reels include: (1) Female connector / (15) Mounting Clips / (2) IP68 End Caps
 Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building an RGB Trulux System?

See pages (48-49) for compatible RGB Trulux controllers & accessories


Trulux RGB Accessories



HD Power Feed (IP54)
TL-4PWR-HD



HD Splice (IP54)
TL-4SPL-HD



HD Linking Cable (IP54)
TL-4JUMP6-HD (6")
TL-4JUMP24-HD (24")



Extension Cables (IP68)
TL-4JUMP68-10 (10ft)
TL-4JUMP68-20 (20ft)



IP68 Mounting Clips
(Qty of 15)
TL-CLIPS-15

Trulux RGB Control



3 Zone Touch Plate
RF Wall Controller
RF-RGBW-3Z



8 Zone Remote
RF Remote Control
RF-RGBW-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z




3 Zone Touch Plate
DMX Wall Controller
DMX-3Z



Trulux DMX Receiver
(Required per zone)
REC-DMX-5A-4Z

Trulux RGB Controller Set-up



RGBW Controller
(3 zone)



Adaptive LED Driver
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required per zone)



Trulux Tape Light